

# Laptop System Setup Guide


## Imaging System: Laptop Computer with DS40 Printer

DS40 Printer



### DS40 Power and USB Connection


DPMS Tech Support Nos.

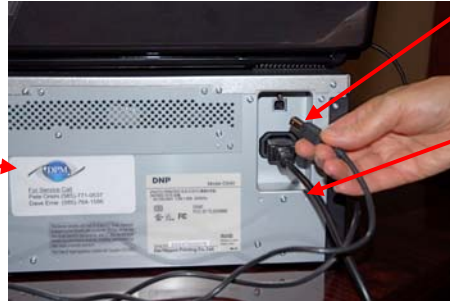

USB Port - printer to laptop connection

Power from Power strip

Remove Printer from the travel case and place on level surface with adequate space for ventilation on each side (at least 2 inches). Plug the power cord into the provided power strip and the other end into the back of the DS40. Turn on the printer switch (front bottom right) and setup printer with paper and ribbon according to the instructions provided. Connect the USB cable (small end) into the printer. Connect the other end into the laptop USB port on the left side. Connect the laptop power cord to the back right side of the laptop. If you prefer to use the mouse rather than the touchpad, connect the mouse USB cable to the right side as shown. Please make sure the Blue Light is on in the front to indicate that Bluetooth is enabled!

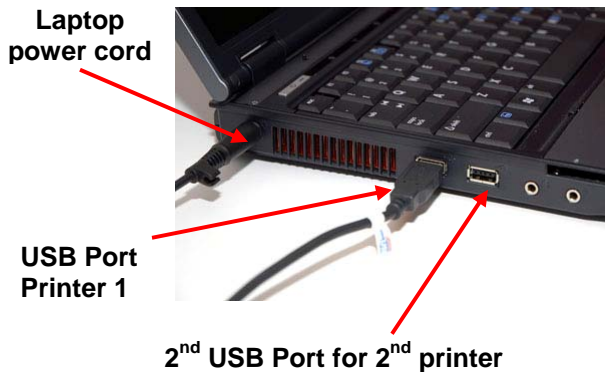

On/Off button


Blue Light ON (Bluetooth)

**-IMPORTANT to note that "French Fries" can cause jams if allowed to stack up.**  
**-NEVER leave paper, ribbon or French fries in the printer when it is to be moved!**

# DS40/DS80 Start-up Guide


Before using, please read "To use this printer safely"

## 1. Check the package contents

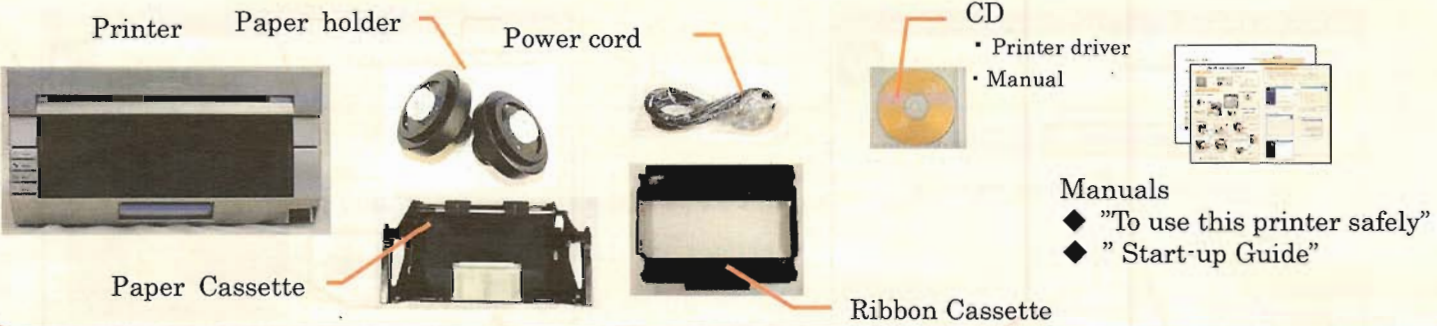

## 2. Set up the printer

### ① Connect the power code

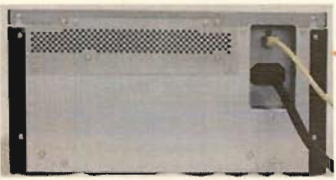

[Note]  
 Also connect the USB cable to the computer



### ③ Turn on the power



[Note]  
 Turn on the computer

### ② Connect the USB cable

### ④ Set the Media



1. Pull out the mechanism unit.



2. Open the Paper Release lever. Remove the scrap box




3. Set a new roll of paper on the paper holders.




4. Set the paper holder into the printer's paper cassette. (Set it all the way in)



5. Remove the seal.

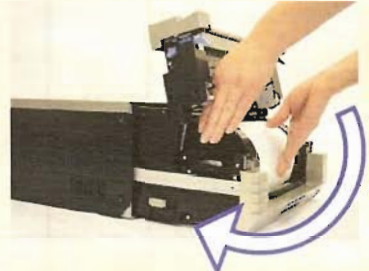


6. Turn the paper in the direction of the arrow. When it is advanced enough, the buzzer will beep, and the flashing LED (orange) will go out.

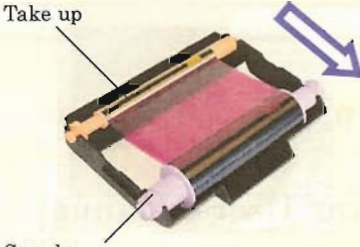

7. Set the new ribbon into the ribbon cassette. Advance the ribbon in the direction of the arrow, and take up any slack.



8. Set it with the supply side in front.

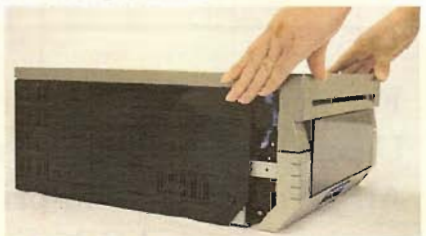

9. Set the scrap box. Close the mechanism unit.

[Note]  
 When the mechanism unit is closed, the printer will run initialization (4 blank sheets will be fed out).